
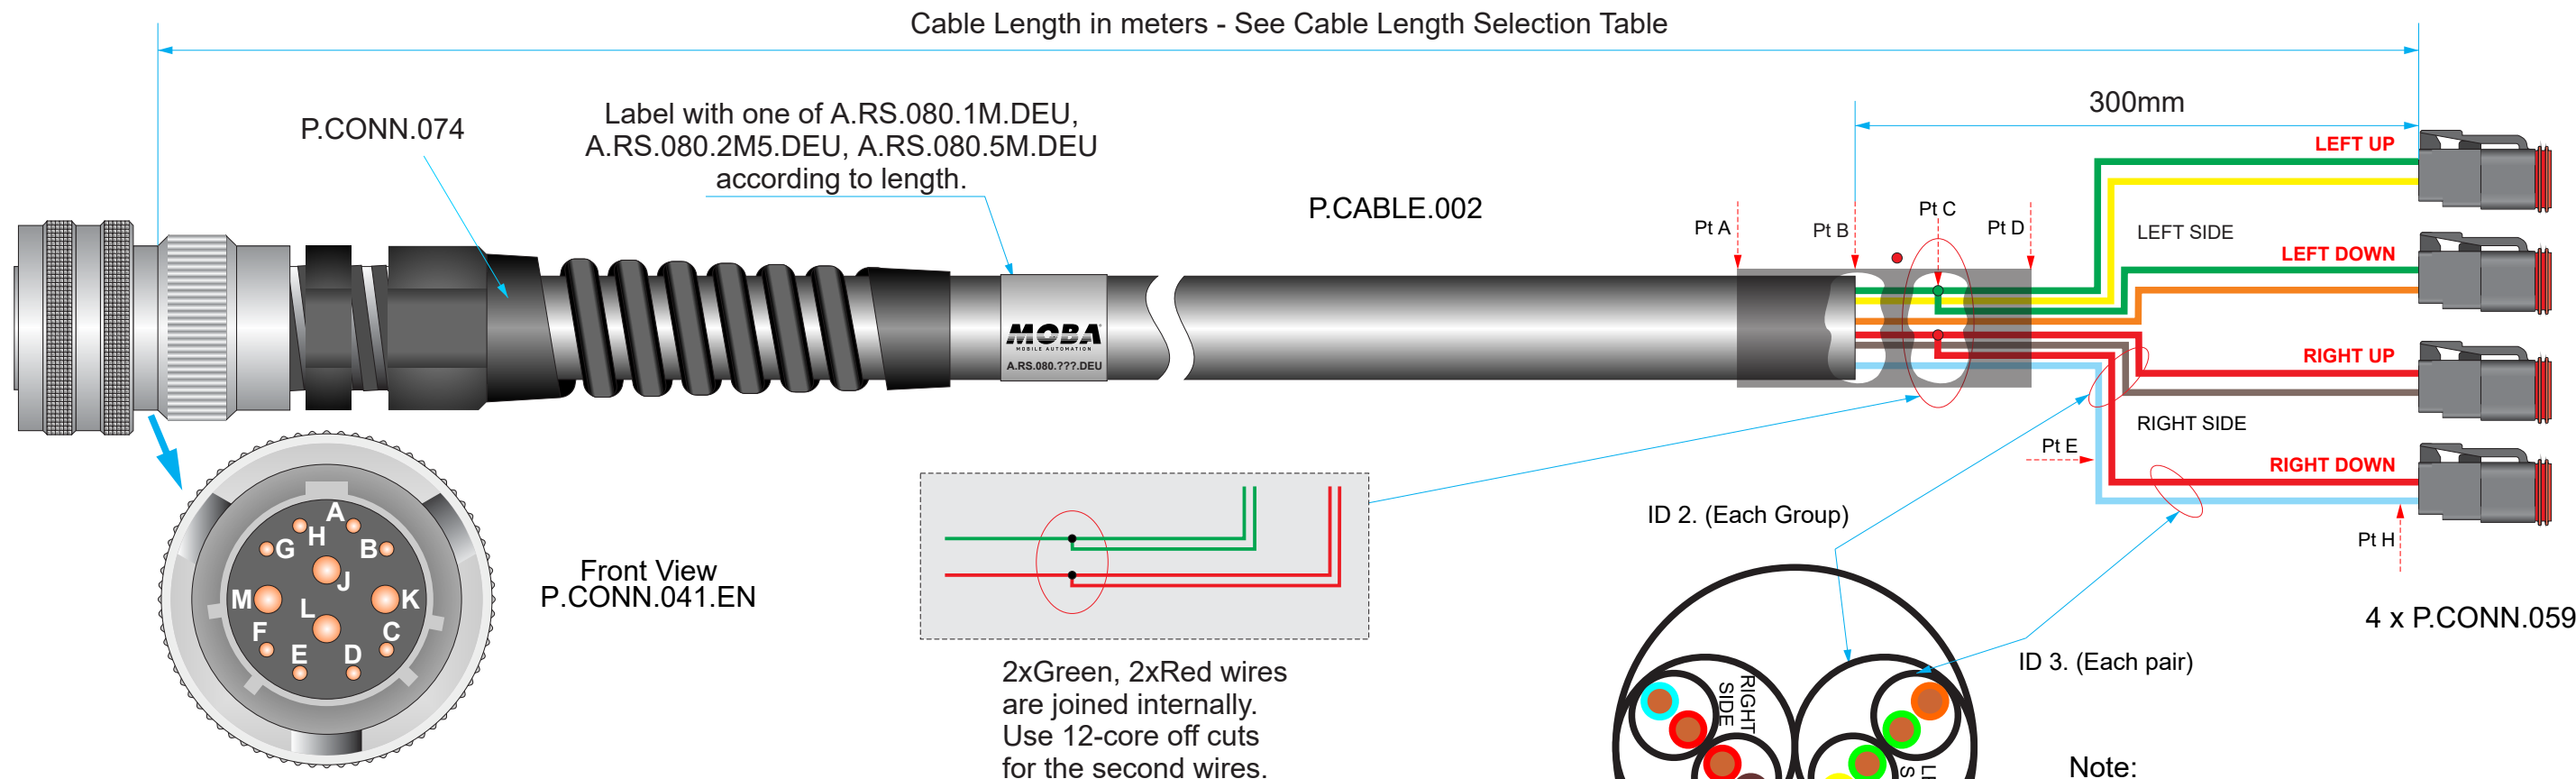






GROUP	P.CONN.041 PIN	WIRE CLOLOUR	WIRE LABEL	P.CONN.059 WIRING ¹
RIGHT SIDE	A C D	RED BROWN AQUA	VCC UP 2 DOWN 2	BROWN  Wiring for UP
				RED  Wiring for DOWN
				AQUA  Wiring for DOWN
LEFT SIDE	L G H	GREEN YELLOW ORANGE	VCC UP 1 DOWN 1	YELLOW  Wiring for UP
				GREEN  Wiring for DOWN
				ORANGE  Wiring for DOWN

¹ Order of wire pairs for each Hirschmann connector is not relevant.

DUO3.CAN Menu Selection:
1) Hydraulic Type: I[O] or On/Off Low Side

HEATSHRINKS			
ID	TYPE	UNSHRUNK LENGTH (mm)	FROM - TO
1	Ø18mm Adhesive, 4:1 ratio	70	Pt A - Pt D
2	Ø13mm Adhesive, 3:1 ratio	90	Pt B - Pt E
3	Ø6mm Adhesive, 3:1 ratio	300	Pt C - Pt H

Cable Length Selection	
MOBA Code	Total Length
A.RS.080.1M.DEU	1 meter
A.RS.080.2M5.DEU	2.5 meter
A.RS.080.5M.DEU	5 meter

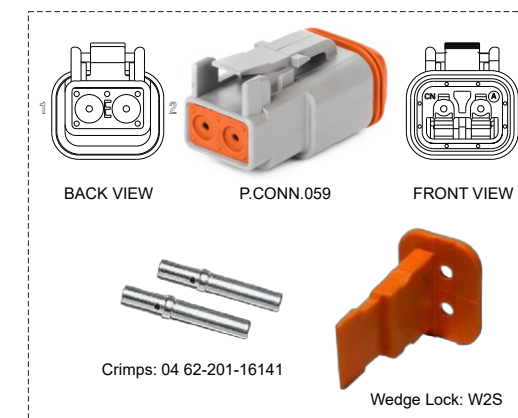

RevNo	Revision note	Date	Signature	Checked	Tolerances	Path: 2-TECH\Product Data\Cables\Electronic CAD\PDF Output\A.RS.080				
00	New Cable	26/03/26	N.A.	C.R.	Unless Stated: xx.x = +/- 0.1 xx.xx = +/- 0.05 xx.xxx = +/- 0.02	Material:	Drawn by:	Checked by:	Unit:	Finish:
						N.A.	C.R.	meter	See Cable Selection	11/02/26
						MOBA MOBILE AUTOMATION 90 Willandra Drive Epping 3076, Vic, Australia +61 3 9357 0055 aumoba@moba.com.au moba.com.au				Title: A.RS.080 I[O] or On/Off Low Side - DEU 1m, 2m5, 5m
						Drawing No:			Page: 1/1	Sheet: A3